

Two-part clamping ring

for connecting pipes with a wall thickness of 1 mm including Egobon sealing insert



Material

1.0038 electrically galvanized
1.4301 stainless steel

Profile



Seal



Egobon seal
inserted in profile

DN nominal width	Inner diameter A	Screw DIN912	Material thickness	Weight
80	86	M6 x 60	1,5	0,177
90	96	M6 x 60	1,5	0,184
100	106	M6 x 60	1,5	0,192
112	118	M6 x 60	1,5	0,201
120	126	M6 x 60	1,5	0,207
125	131	M6 x 60	1,5	0,211
140	146	M6 x 60	1,5	0,222
150	156	M6 x 60	1,5	0,230
160	166	M6 x 60	1,5	0,237
175	181	M6 x 60	1,5	0,249
180	186	M6 x 60	1,5	0,253
200	206	M6 x 60	1,5	0,268
224	230	M6 x 60	1,5	0,286
250	256	M8 x 60	1,5	0,380
280	286	M8 x 60	1,5	0,403
300	306	M8 x 60	1,5	0,418
315	321	M8 x 60	1,5	0,429
350	356	M8 x 60	1,5	0,456
355	361	M8 x 60	1,5	0,460
400	406	M8 x 60	1,5	0,494
450	456	M8 x 60	1,5	0,532
500	506	M8 x 60	1,5	0,570
550	556	M8 x 60	1,5	0,608
560	566	M8 x 60	1,5	0,616
600	606	M8 x 60	1,5	0,646
630	636	M8 x 60	1,5	0,669

Versions in

steel 1.0038,
electrically galvanized



stainless steel 1.4301

i The two-part ESKATE clamping ring with gasket for 1mm pipe systems is regarded as an all-rounder. It can be used everywhere and due to its special articulated latch technology is considered to be very easy to assemble especially in inaccessible areas. The lug prevents loss of the screw during assembly.

Note: The gasket can remain in the clamping ring during assembly and does not need to be removed.

i Very short lead times due to all year round availability from stock. Custom and non-standard factory sizes available on request

Minimum order value: Net goods value of 40.00 euros. The prices do not include VAT, packaging and forwarding. All dimensions in mm. All weights in kg. Subject to errors and alterations.

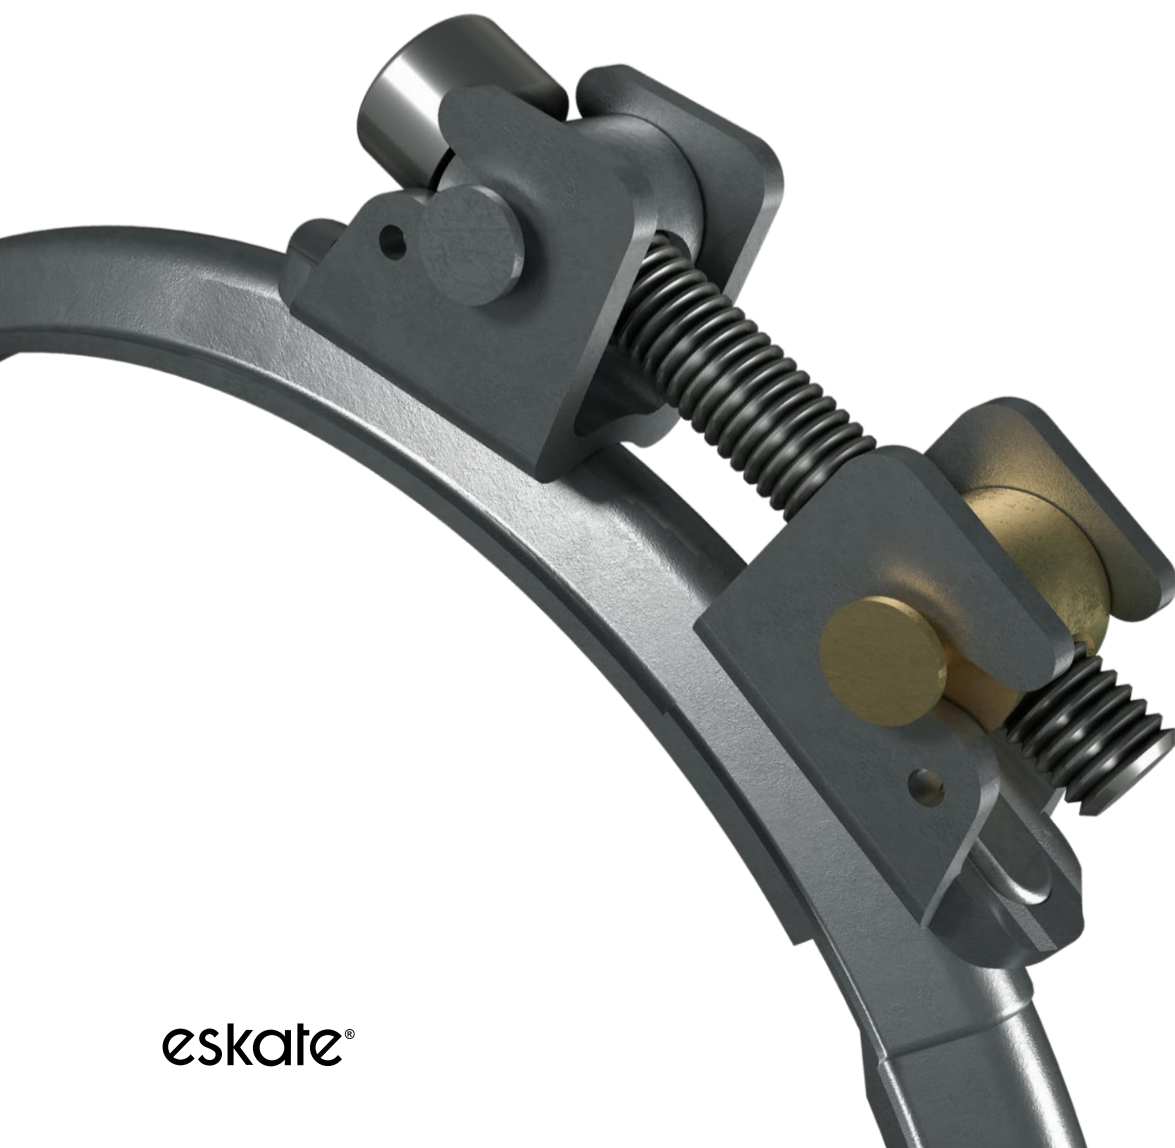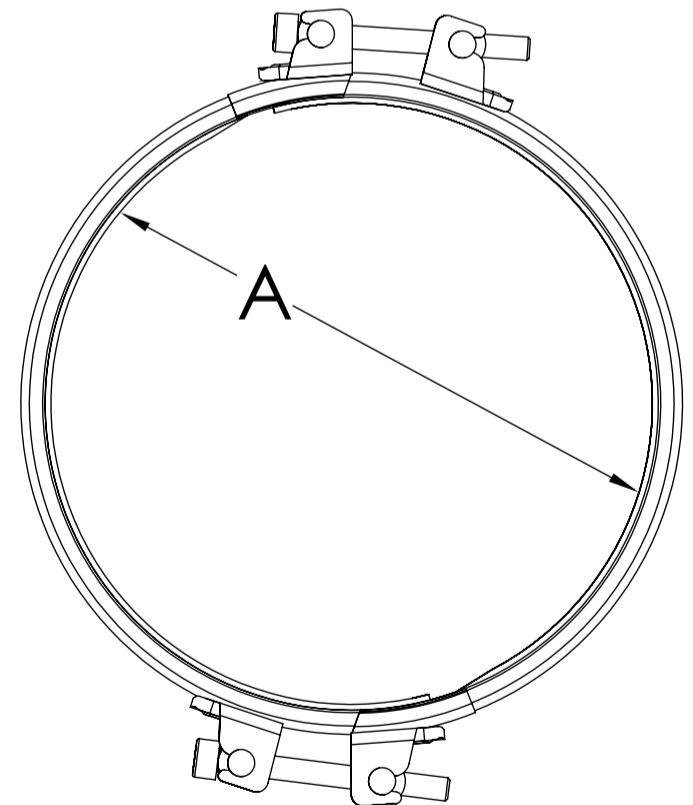

We would be pleased to advise you on your individual terms and designs. Just give us a call.

✉ info@eskate.de ☎ +49 5734 66 66 6

Two-part clamping ring

for connecting pipes with a wall thickness of 2mm including EgoBon sealing insert




Material

1.0038 electrically galvanized
1.4301 stainless steel

Profile



Seal



EgoBon seal
inserted in profile

DN nominal width	Inner diameter A	Screw DIN912	Material thickness	Weight
80	86	M8 x 60	1,5	0,262
90	96	M8 x 60	1,5	0,271
100	106	M8 x 60	1,75	0,280
112	118	M8 x 60	1,75	0,290
120	126	M8 x 60	1,75	0,297
125	131	M8 x 60	1,75	0,302
140	146	M8 x 60	1,75	0,315
150	156	M8 x 60	1,75	0,324
160	166	M8 x 60	1,75	0,333
175	181	M8 x 60	1,75	0,346
180	186	M8 x 60	1,75	0,351
200	206	M8 x 60	1,75	0,368
224	230	M8 x 60	1,75	0,390
250	256	M8 x 60	1,75	0,413
280	286	M8 x 60	1,75	0,439
300	306	M8 x 60	1,75	0,457
315	321	M8 x 60	1,75	0,470
350	356	M8 x 60	1,75	0,501
355	361	M8 x 60	1,75	0,506
400	406	M8 x 60	1,75	0,546
450	456	M8 x 60	1,75	0,590
500	506	M8 x 60	1,75	0,634
550	556	M8 x 60	1,75	0,679
560	566	M8 x 60	1,75	0,688
600	606	M8 x 60	1,75	0,723
630	636	M8 x 60	1,75	0,750

Versions in

steel 1.0038,
electrically galvanized



stainless steel 1.4301

i The two-part ESKATE clamping ring with gasket for 2mm pipe systems is regarded as an all-rounder. It can be used everywhere and due to its special articulated latch technology is considered to be very easy to assemble especially in inaccessible areas. The lug prevents loss of the screw during assembly.

Note: The gasket can remain in the clamping ring during assembly and does not need to be removed.

i Very short lead times due to all year round availability from stock. Custom and non-standard factory sizes available on request

Minimum order value: Net goods value of 40.00 euros. The prices do not include VAT, packaging and forwarding. All dimensions in mm. All weights in kg. Subject to errors and alterations.

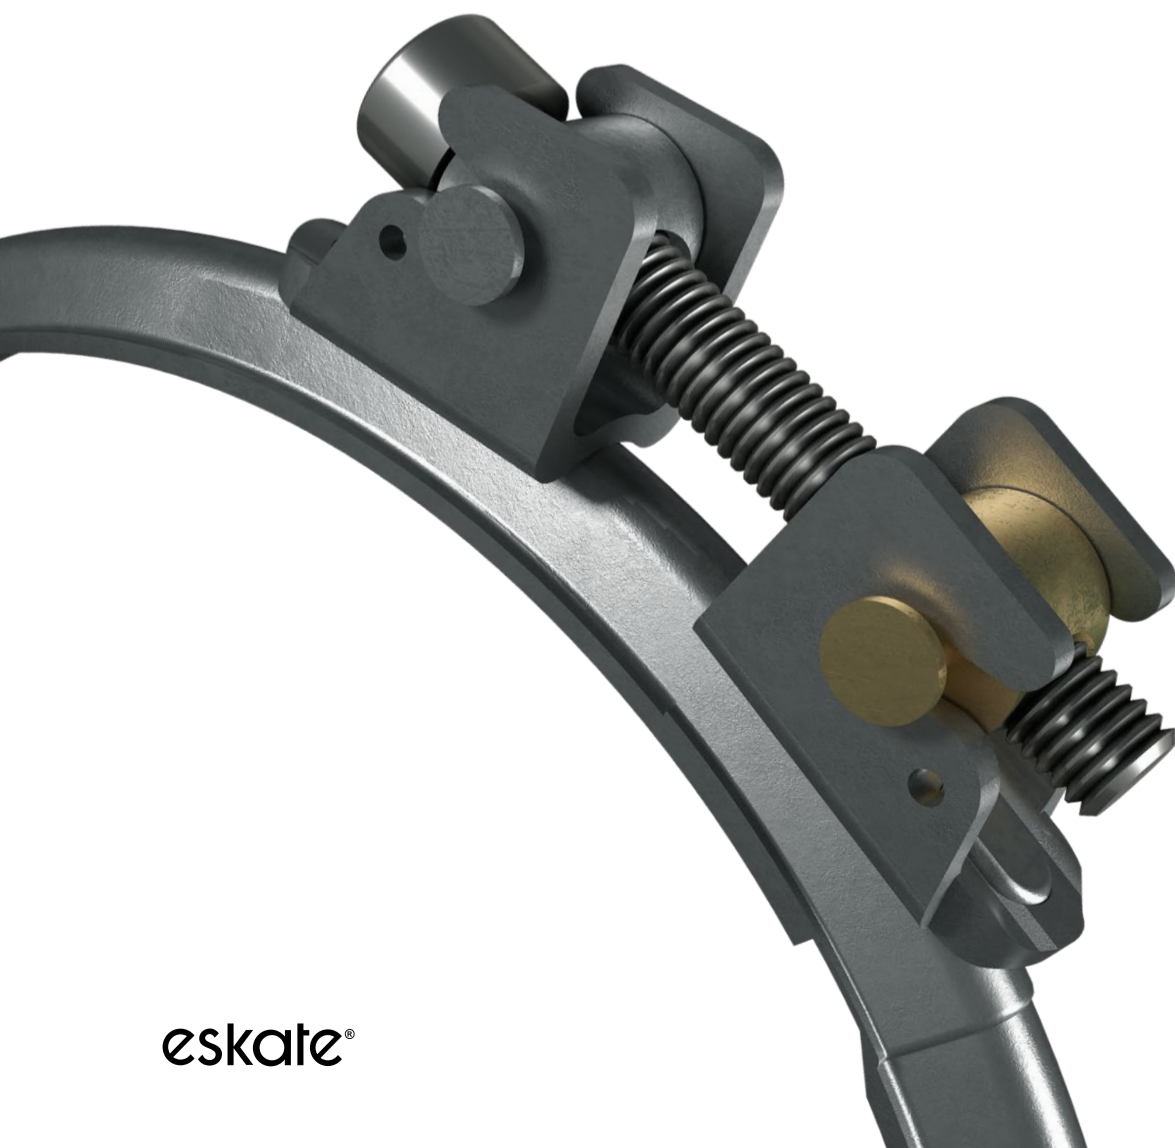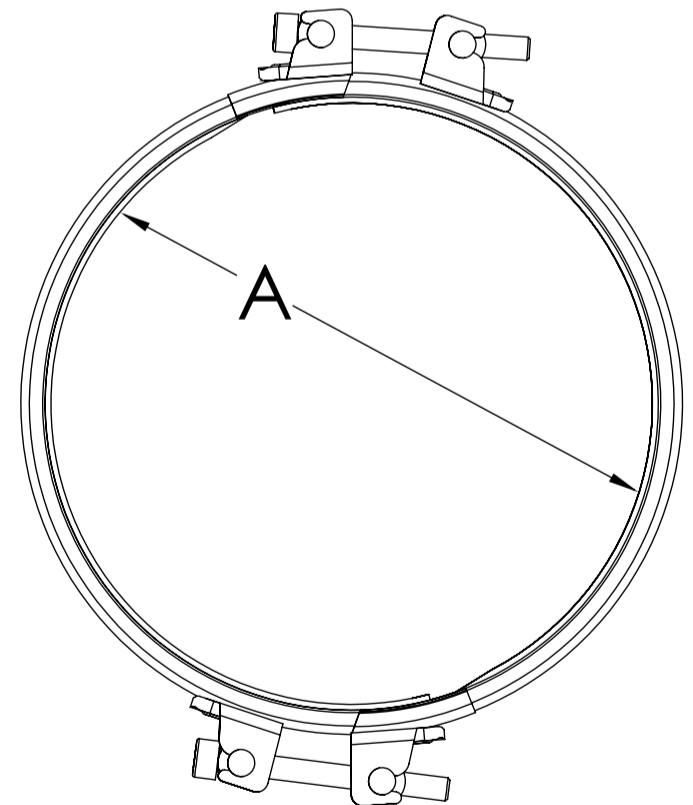

We would be pleased to advise you on your individual terms and designs. Just give us a call.

✉ info@eskate.de ☎ +49 5734 66 66 6

Two-part clamping ring

for connecting pipes with a wall thickness of 3mm including Egobon sealing insert



Material

1.0038 electrically galvanized
1.4301 stainless steel

Profile



Seal



Egobon seal
inserted in profile

DN nominal width	Inner diameter A	Screw DIN912	Material thickness	Weight
80	86	M8 x 60	1,5	0,262
90	96	M8 x 60	1,5	0,271
100	106	M8 x 60	1,75	0,280
112	118	M8 x 60	1,75	0,290
120	126	M8 x 60	1,75	0,297
125	131	M8 x 60	1,75	0,302
140	146	M8 x 60	1,75	0,315
150	156	M8 x 60	1,75	0,324
160	166	M8 x 60	1,75	0,333
175	181	M8 x 60	1,75	0,346
180	186	M8 x 60	1,75	0,351
200	206	M8 x 60	1,75	0,368
224	230	M8 x 60	1,75	0,390
250	256	M8 x 60	1,75	0,413
280	286	M8 x 60	1,75	0,439
300	306	M8 x 60	1,75	0,457
315	321	M8 x 60	1,75	0,470
350	356	M8 x 60	1,75	0,501
355	361	M8 x 60	1,75	0,506
400	406	M8 x 60	1,75	0,546
450	456	M8 x 60	1,75	0,590
500	506	M8 x 60	1,75	0,634
550	556	M8 x 60	1,75	0,679
560	566	M8 x 60	1,75	0,688
600	606	M8 x 60	1,75	0,723
630	636	M8 x 60	1,75	0,750

Versions in

steel 1.0038,
electrically galvanized



stainless steel 1.4301

i The two-part ESKATE clamping ring with gasket for 3mm pipe systems is regarded as an all-rounder. It can be used everywhere and due to its special articulated latch technology is considered to be very easy to assemble especially in inaccessible areas. The lug prevents loss of the screw during assembly.

Note: The gasket can remain in the clamping ring during assembly and does not need to be removed.

i Very short lead times due to all year round availability from stock. Custom and non-standard factory sizes available on request

Minimum order value: Net goods value of 40.00 euros. The prices do not include VAT, packaging and forwarding. All dimensions in mm. All weights in kg. Subject to errors and alterations.

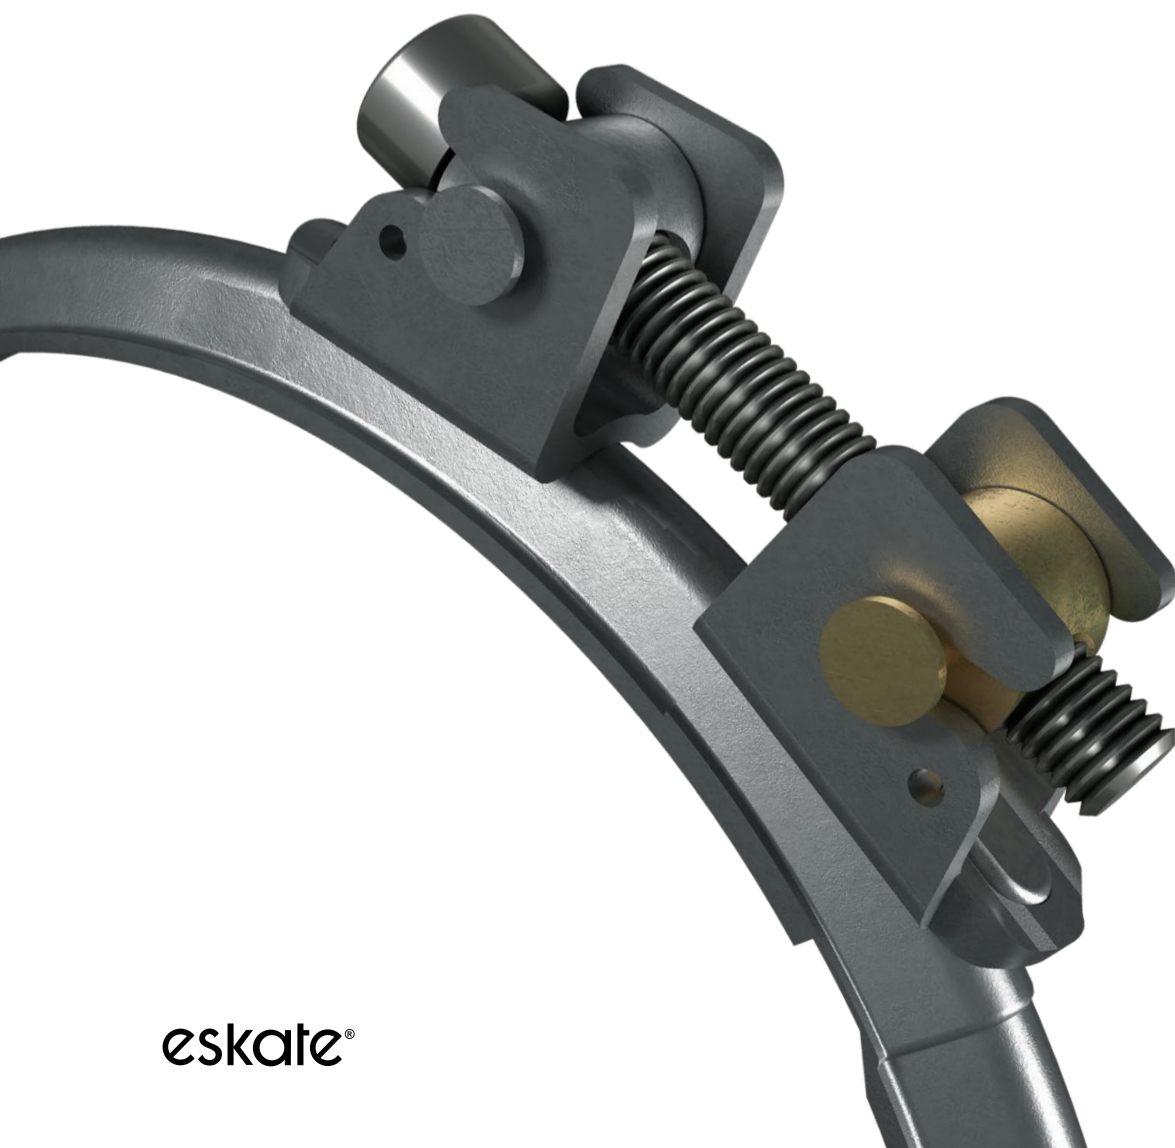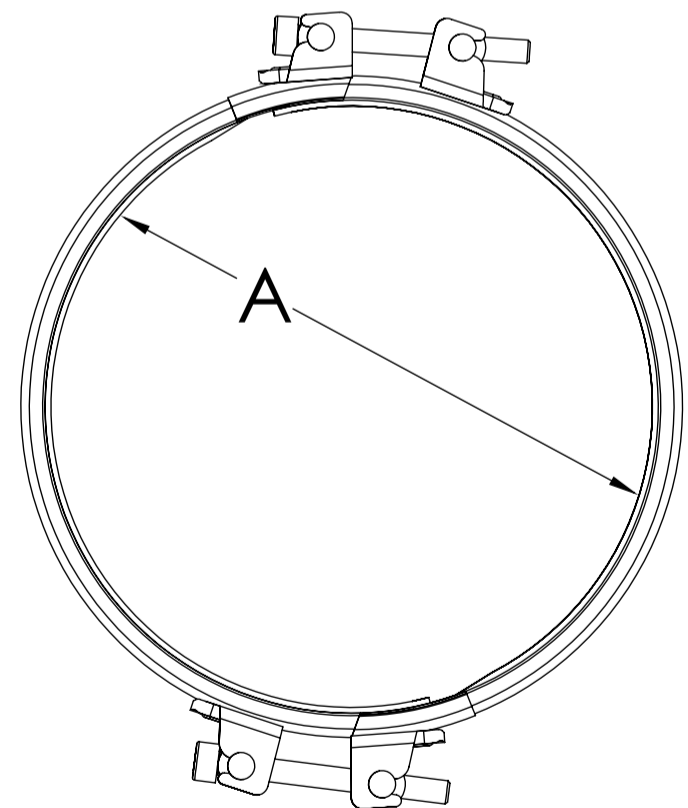

We would be pleased to advise you on your individual terms and designs. Just give us a call.

✉ info@eskate.de ☎ +49 5734 66 66 6